

MT50-LED T HO AC

Suspended/Surface

encapsulite

ILLUMINATING BY DESIGN




Tube \varnothing 50mm



Cap \varnothing 55mm



Light output 180°

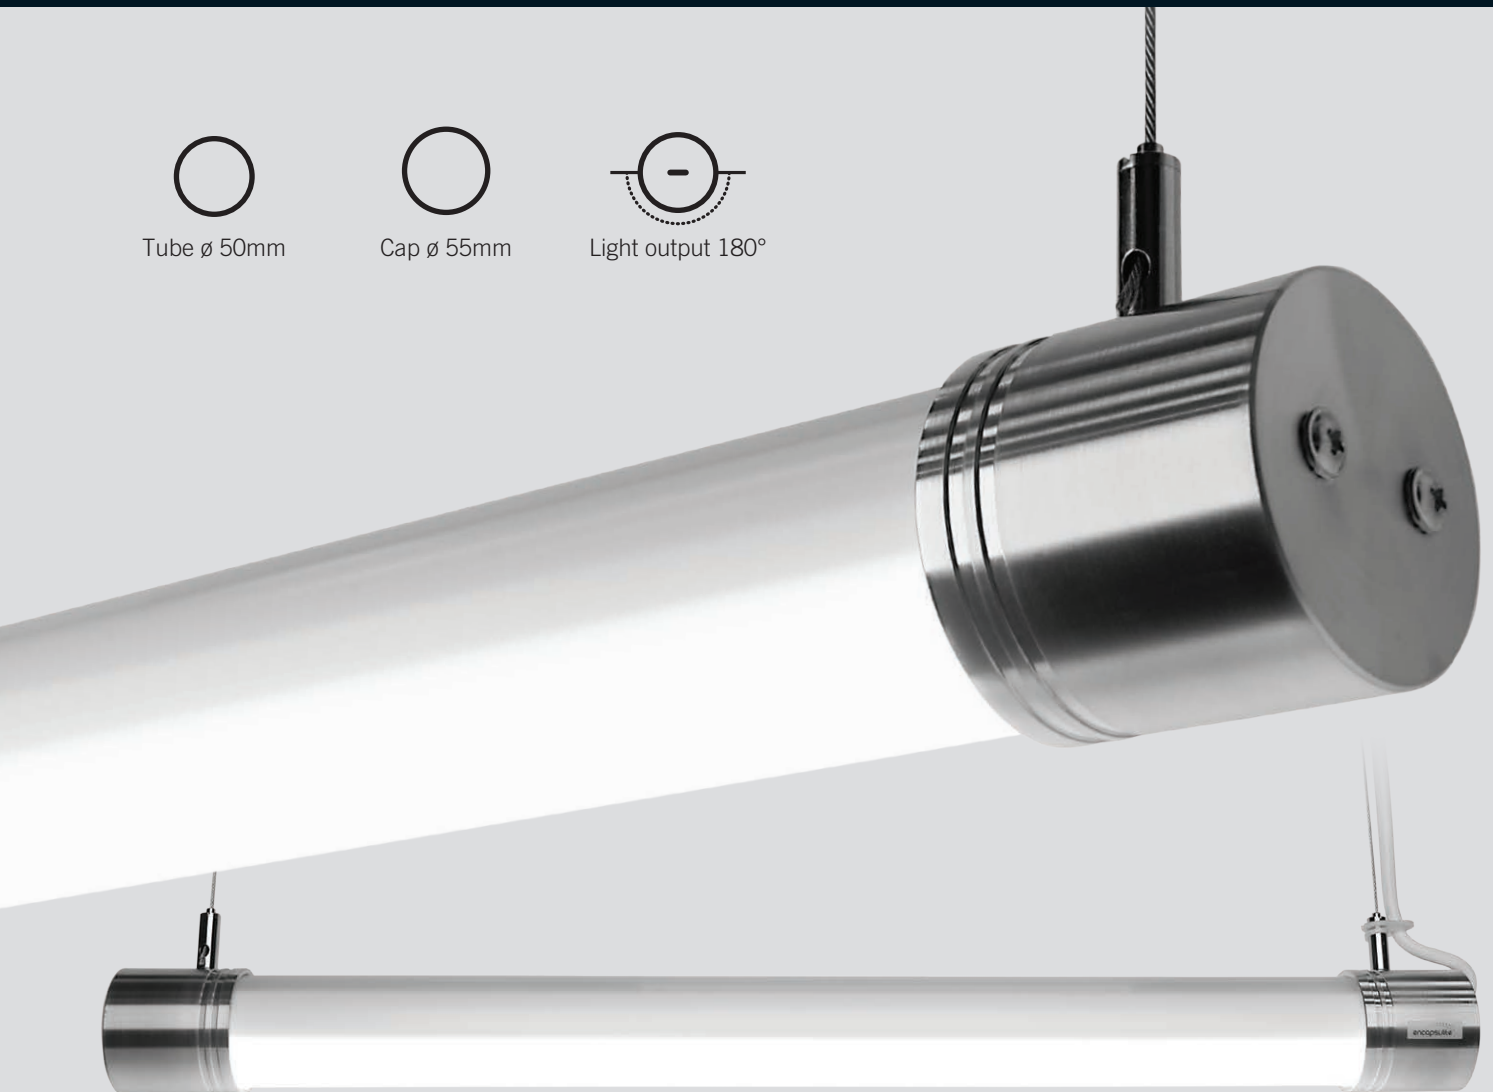

Tubular diffused LED light, black or polished aluminium end caps.

The MT50-LED T HO AC is a slim robust LED diffused lit tubular design, this can be suspended horizontally or surface mounted. The svelte tube offers a 180° light distribution through its polycarbonate opal diffuser.

The MT50-LED T HO AC is an incredibly versatile linear lighting solution. Machined polished aluminium end caps can also be anodized black.

50mm diameter, (55mm \varnothing end caps) the MT50-LED T HO AC makes use of efficient LED technology offering switched or DALI dimming options for a controllable level of light output.

Suitable for almost any interior application.



Black Cap optional

MT50-LED T HO AC

Suspended/Surface



ILLUMINATING BY DESIGN

Light source information

LED/Electronic Driver 3000k 4000k 5000k
other variants to order please enquire.

High efficiency and high output available.

Design

Suspended horizontally or surface
mounted.

Polycarbonate opal diffuser with
polished/black aluminium end caps.

IP20 rated as standard, IP67 available
on request (alternative end caps).

Class I, ta 25°C, 850GWT.

Dimming

Non-dimmable as standard.

DALI DSI.

Installation

Two suspension points for fully adjustable
horizontal suspension.

Surface mounting with discreet fixings or
clamps.

Installation Instructions available on
request.

Optics

Opal diffuser.

Clear diffuser available.

Photometric data available.

Miscellaneous

3hr Emergency available HE only not HO.
pre wired, Plug & Go.

If you would like to change something,
please ask.

Mounting options



Suspension



Plastic clamp



Stainless steel clamp

MT50-LED T HO AC SATIN

PART NR	LENGTH mm	SATIN Lm	CIRCUIT POWER W	LUMEN CIRCUIT W	CE	230v 50-60 Hz
MT50-LED T2 HO AC SATIN	595	2415	19.0	124	ta 25°C	Class I
MT50-LED T3 HO AC SATIN	885	3205	27.4	117		
MT50-LED T4 HO AC SATIN	1175	4060	36.0	113	IP20	LED
MT50-LED T5 HO AC SATIN	1460	5055	44.0	115		
MT50-LED T6 HO AC SATIN	1755	6350	51.8	116	EEI A	850 GWT
MT50-NME AC SC Emergency standalone Non Maintained	580	440	3.4	-		

Weitere Informationen/Optionen unter +49 (0) 2241 844 933
oder per E-Mail info@encapsulite-europe.com